


ARAN RANGETechnical Specifications

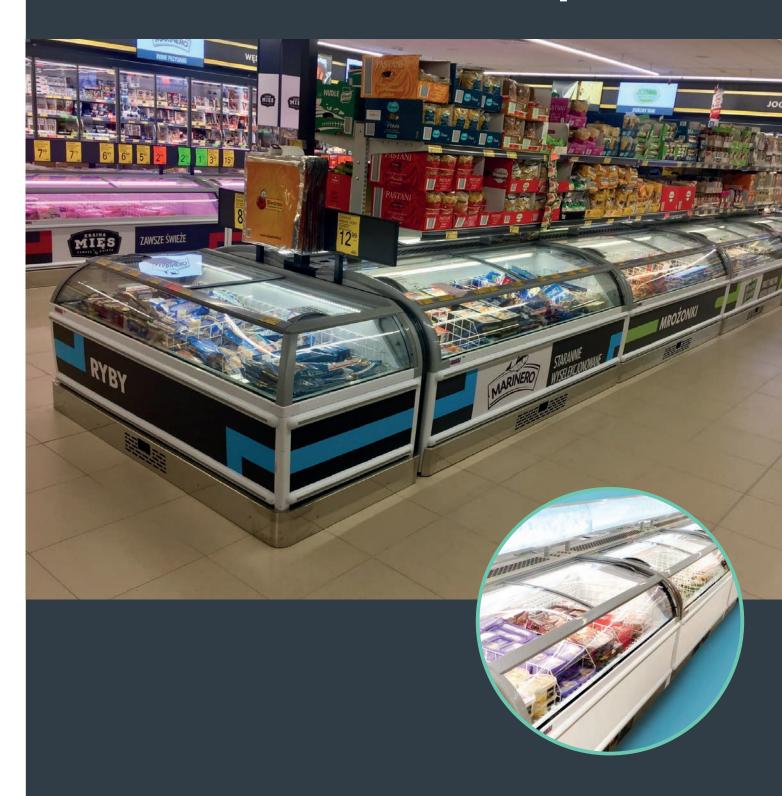

The ARAN RANGE

The DOE approved Aran range combines exceptional panoramic product visibility, superior product facing combined with technical innovations like LED lighting, automatic defrost and dual refrigeration system with thermally sealed curved glass lids to reduce energy consumption and improve the customer experience. The design concept was simple - people buy what they see, so let's give the best possible visibility.

The unique curved glass front, the cornerstone of the Novum Aran range, offers an unequalled view into the cabinet leading to increased impulse sales.



approved



27%Higher visibility



Universal Freezer & Chiller



*35%
Lower on
Energy Bills



Lift up or Sliding lids Save on Energy

*when compared to remote refrigeration




The Novum ARAN RANGE


is guaranteed to enhance the image of your store and improve your customer shopping experience. It is a versatile cabinet that can be used as a stand alone unit, as part of a line-up, back to back or as part of a full island and is available with either sliding lids or a full, lift-up lid.

Technical Specification


| Aran Range | Model | 806L | 706L |
|--|-------------|--------------|--------------|
| Technical Data | | | |
| Gross content | cu. ft. | 32.4 | 22 |
| Net Content according to EN 23953 | cu. ft. | 26.2 | 20 |
| Total Display Area (TDA) | sq. ft. | 15.5 | 12.9 |
| Classification according to EN 23953 | | 3L1 | 3L1 |
| Ambient Temperature Range | °F | +61 to +77 | +61 to +77 |
| Inner Temperature Range | °F | O to -13 | O to -13 |
| Sound Pressure at 1m Distance | dB(A) | 43 .3 | 43 .3 |
| Electrical Data | | | |
| Nominal Voltage / Frequency | V / Hz | 110-120 / 60 | 110-120 / 60 |
| Nominal Power Cabinet | W | 700 | 700 |
| Nominal Power LED Light | W | 24 | 24 |
| Nominal Current | А | 7 | 7 |
| Fuse Protection | А | 15 | 15 |
| Energy consumption (at 77°F) | kWh/24h | 7.8 | 8.6 |
| Length of Power Supply Cord | inches | 78.7 | 78.7 |
| Refrigeration Data | | | |
| Refrigerant | Туре | R290 | R290 |
| Gas Charge | OZ | 3.5 X 2 | 3.5 X 2 |
| Maximum Operating Pressure | PSI | 435 | 435 |
| Maximum Heat Output | W/h (Btu/h) | 1130 (3853) | 1130 (3853) |
| Dimensions | | | |
| Length Outside/ Inside | inches | 86.8 / 81.1 | 75.0 / 69.3 |
| Depth Outside/ Inside | inches | 32 .7 / 27 | 32.7 / 27 |
| Front Access Height Outside / Inside | inches | 36.5 / 25.6 | 36.5 / 25.6 |
| Stacking Height at the Front / Back | inches | 23.6 / 25.6 | 23.6 / 25 .6 |
| Weight | | | |
| Net Weight (excl. packaging, incl. internal accessories) | lbs | 421 | 412 |
| Gross Weight (incl. packaging & internal accessories) | lbs | 494 | 485 |

Dimensions Aran 706L





Dimensions Aran 806L

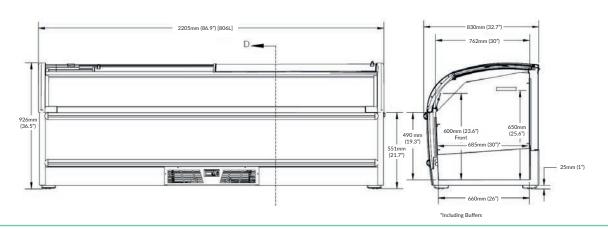

Novum USA 7405 Graham Road Suite B Fairburn

GA 30213

Phone: (678) 787-0755



