


# NOVUM

Redefining refrigeration

## ALASKAN - WALKAROUND DISPLAY MERCHANDISER Technical Specifications

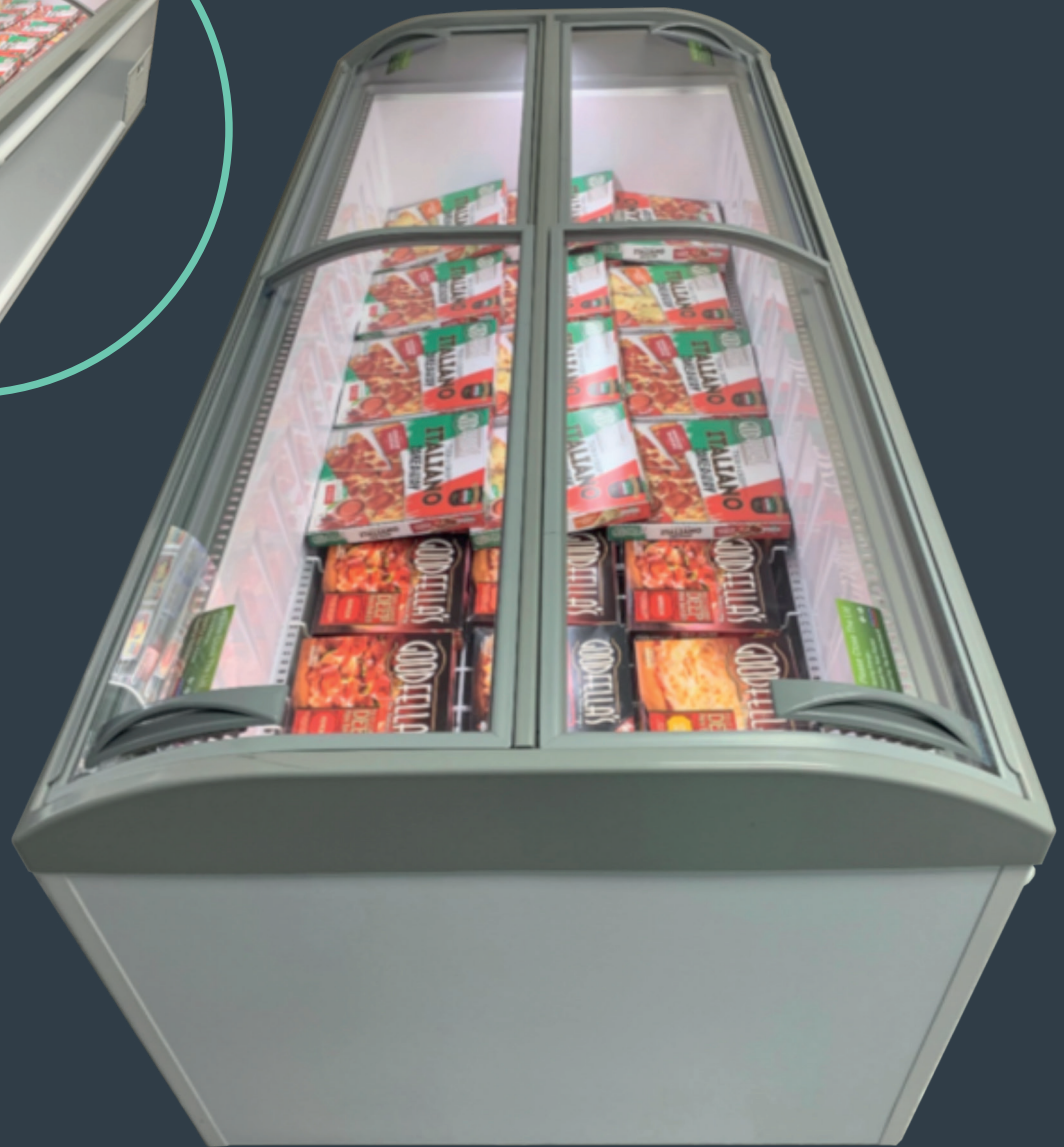

Frost Free



"Best in Class"  
ENERGY  
CONSUMPTION  
(based upon EU Standard)

ICE FREE

[www.novum.ie](http://www.novum.ie)

# The ALASKAN - WALKAROUND DISPLAY MERCHANDISER

is our latest innovation. It was developed from the ground up to incorporate Novums LEAP technology. The benefits of which are clear - No frost build up internally, unique cassette refrigeration system & the lowest running costs of any cabinet of its size on the market.

The Alaskan combines superior internal volume, with excellent product visibility & product facings. Access from both sides with 4 x glass lids. 1 x ultra-bright centre mount LED lighting combined with a clean white interior provides spectacular illumination of the product. This combined with Novum's LEAP Technology, makes a truly class leading cabinet.



**Removable  
Cassette**



**Centre  
mount LED  
Lighting as standard**



**Lower  
Energy Bills**



**100%  
Frost Free**

\*when compared to next best in class competitor



ENERGY LABEL:




The unique curved glass offers an unequalled access into the cabinet. In practice, this means that the whole of the cabinet can easily be shopped from either side. The Novum Alaskan is guaranteed to enhance the image of your store, save you money and improve your customer shopping experience.

It is a versatile cabinet that can be used as a stand-alone unit, as part of a line-up, back to back or as part of a full island and is available with sliding lids.

## Technical Specification

	Model	Alaskan
<b>Technical Data</b>		
Gross content	litre	1068
Net Content according to EN 23953	litre	830
Glass Area Display Area	M <sup>2</sup>	1.4
Total Display Area (TDA) according to Eco-design Directive	M <sup>2</sup>	1.29
Classification according to EN 23953		3L1
Energy Class according to Eco-design Directive		C
Ambient Temperature Range	°C	+16 to +25
Inner Temperature Range	°C	-18 to -25
Sound Pressure at 1m Distance	dB(A)	43.3
<b>Electrical Data</b>		
Nominal Voltage / Frequency	V / Hz	220-240 / 50
Nominal Power Cabinet	w	310
Nominal Power LED Light	w	19
Nominal Current	A	2.3
Fuse Protection	A	10
Energy consumption at 25°C according to Eco-design Directive	kWh/24h	4.832
Length of Power Supply Cord	mm	2000
<b>Refrigeration Data</b>		
Refrigerant	Type	R290
Gas Charge	g	65
Maximum Operating Pressure	bar	30
Max Transient Heat Output	W/h (Btu/h)	780 (2661)
Net Average Heat Rejection	W/h (Btu/h)	200 (682)
<b>Dimensions</b>		
Length Outside/ Inside	mm	2108 / 1925
Depth Outside/ Inside	mm	978 / 803
Front & Back Access Height Outside / Inside	mm	884 / 788
Stacking Height at the Front / Back	mm	580
<b>Weight</b>		
Net Weight (excl. packaging, incl. internal accessories)	Kg	140
Gross Weight (incl. packaging & internal accessories)	Kg	150

## Dimensions Alaskan

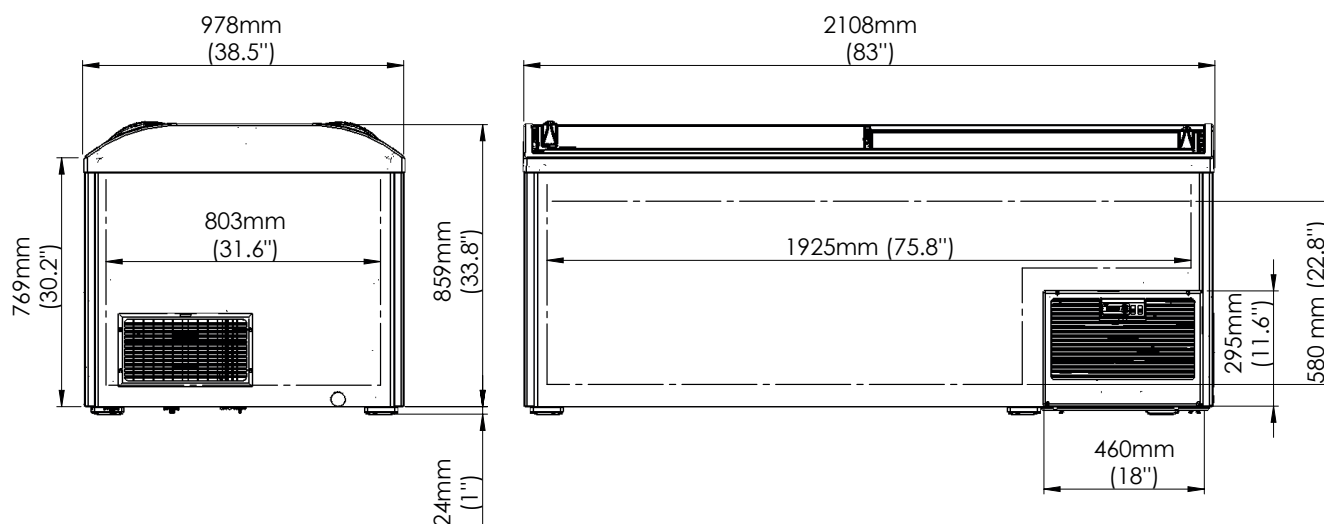

**Novum (Overseas) Ltd.**

The Novum Building  
Clonshaugh Technology & Business Park  
Dublin 17, Ireland

+353 1 803 6400

[www.novum.ie](http://www.novum.ie)

**NOVUM**  
Redefining refrigeration